




Leicestershire  
County Council

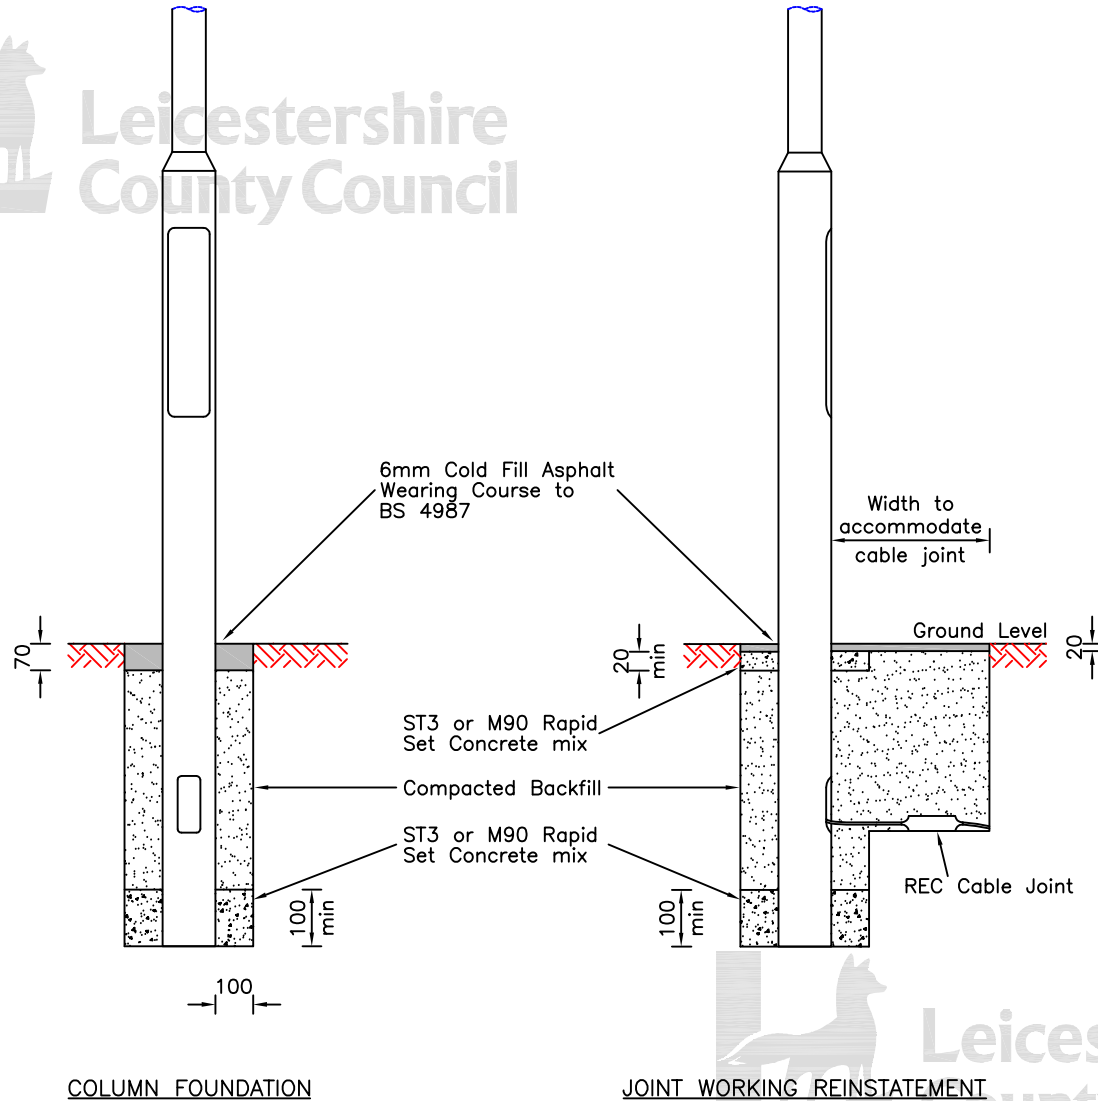

NOTES:

GENERAL NOTES

COLUMN HOLE

Column hole to be excavated by hand to a depth equivalent to the planting depth. Diameter of hole to be approximately 200mm greater diameter than column based centrally in excavation (where possible) with the column door orientated at 90° to kerb edge facing away from oncoming traffic.

GRASS SURFACE

In the case of a grass surface the top layer of turf is to be carefully removed and replaced around base when column is installed.

ASPHALT SURFACES

For asphalt surfaces the column hole is to be squared off using a power saw.

CONCRETE MIX

Material to be ST3 concrete mix or M90 rapid set building cement and sand mix at a ratio 3 parts sand to 1 part cement (or similar approved). Material to be thoroughly tamped down.

COMPACTED BACKFILL

A compacted material consisting of the original excavated material or a suitable approved granular material or a combination of both to be thoroughly compacted.

WEARING COURSE

A wearing course consisting of a 20 or 70mm (where specified) compacted thickness of 6mm nominal size fine graded wearing course BS 4987 Cl 2.7.7) which shall be applied, brushed in and rolled immediately following the laying of the base course or 6mm nominal size dense wearing course (BS 4987 Cl 2.7.5).

UNCOATED STONE SURFACES

The final reinstatement shall be carried out using similar material as that prior to disturbance and of the same thickness.

©Crown copyright 2007. All rights reserved. Use of this image is limited to viewing on-line and printing one copy. Leicestershire County Council 100519271.



TITLE:	STANDARD DRAWING	STREET LIGHTING
	COLUMN FOUNDATION AND REINSTATEMENT DETAILS	

DRAWING NUMBER	DATE			
SD/13/1	APRIL 2007			
AUTOCAD REF	SCALE			
K:\GENERAL\ID9997\STDDRG\SD131	NOT TO SCALE	Rev	Date	Notes on Revision